


Fire tape – Mounted on tear indicator

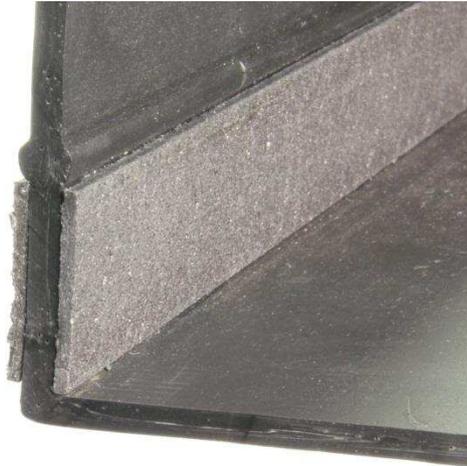

Description

For fire-proofing of expansion joints, tear indicator can be delivered with pre-glued fire tape on both sides. This solution is independent of where the joint movement occurs. In a fire, the tape expands to a minimum of 30 times its own thickness, forming a pressure-tight joint to prevent the spread of fire. The fire tape is reinforced and self-adhesive on one side. The fire tape is approved by DIBt – Center of Competence in Civil Engineering.

Material:

Graphite-based, fibre-free and fire retardant.

Specific gravity: 1.3Kg/dm³

Width: 20 mm

Thickness: 1.5 mm.

Stock programme:

25 metre roll/1 kg

15 rolls per box

Accessories:

Tear indicator for fire taping as per drawing PTC-084-2 and fire protection fabric.