


## Galfan C-Rings

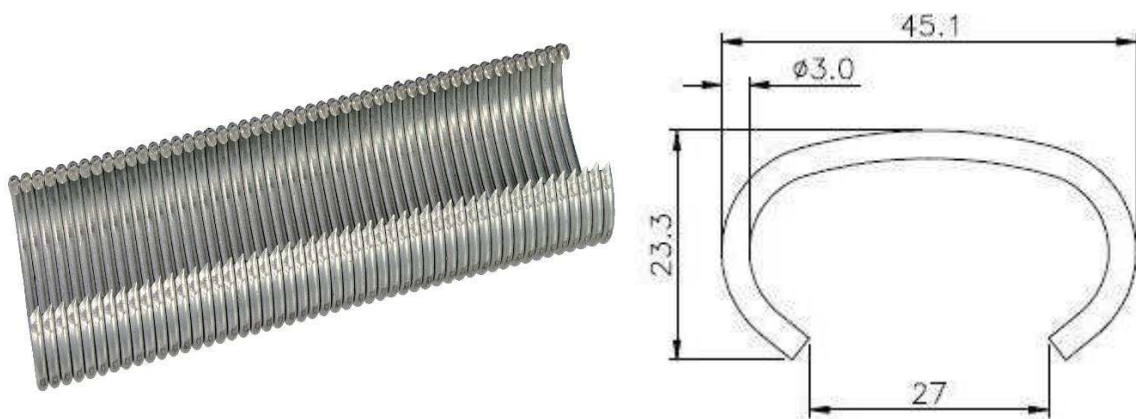

Most commonly used for joining various mesh and panel solutions. For use with a pneumatic hog ring gun.

### Stock programme:

Strips of 50 pcs. Delivered in boxes of 1,600 pcs. 130 boxes per pallet.

Weight per box 8.2 kg. Weight per pallet 1066 kg.

### Technical information:

Wire diameter 3 mm.

Material zinc/aluminium

Tensile strength 1700 ~ 1900 N/mm<sup>2</sup>

C ring opening after crimping 11 mm ~ 13 mm

### Corrosion protection/Pc-Coat

Hot-dip galvanization is carried out in compliance with NS-EN-ISO 1461 and epoxy powder coating in compliance with NS-EN 13438.

With regard to coating thickness and further information, please see Document Q/PTC-T19A – Specification for Pc-Coat – SVV/JBV.

Please also refer to the Pc-Coat Product Data Sheet and accompanying FDV documentation.

### Accessories:

Pneumatic hog ring gun